


1		2		3		4	
A 指定公差 General tolerance	角度公差 Angular tolerance ±[°]		寸法公差 Dimensional tolerance ±[mm]		図番 Drawing No.		ページ Page
					SPH-10EA-W18		1/1
	短辺長さ Length of short side		精 f 10 50 100 中 m 0.1 0.3 0.5 0.7 粗 c 0.3 0.5 1 1.2 2		改訂 Rev.	年月日 Date	改訂履歴 Revisions

SPECIFICATIONS

Maximum Power Output of Speaker	10W
Output Impedance	8Ω
Sound Pressure Level	106dB or higher (at1m 1W)
Frequency Characteristic	350~8kHz
Operating Temperature Range	-20~55℃
Mass	0.9kg±10%
Mounting Direction	Normal Only

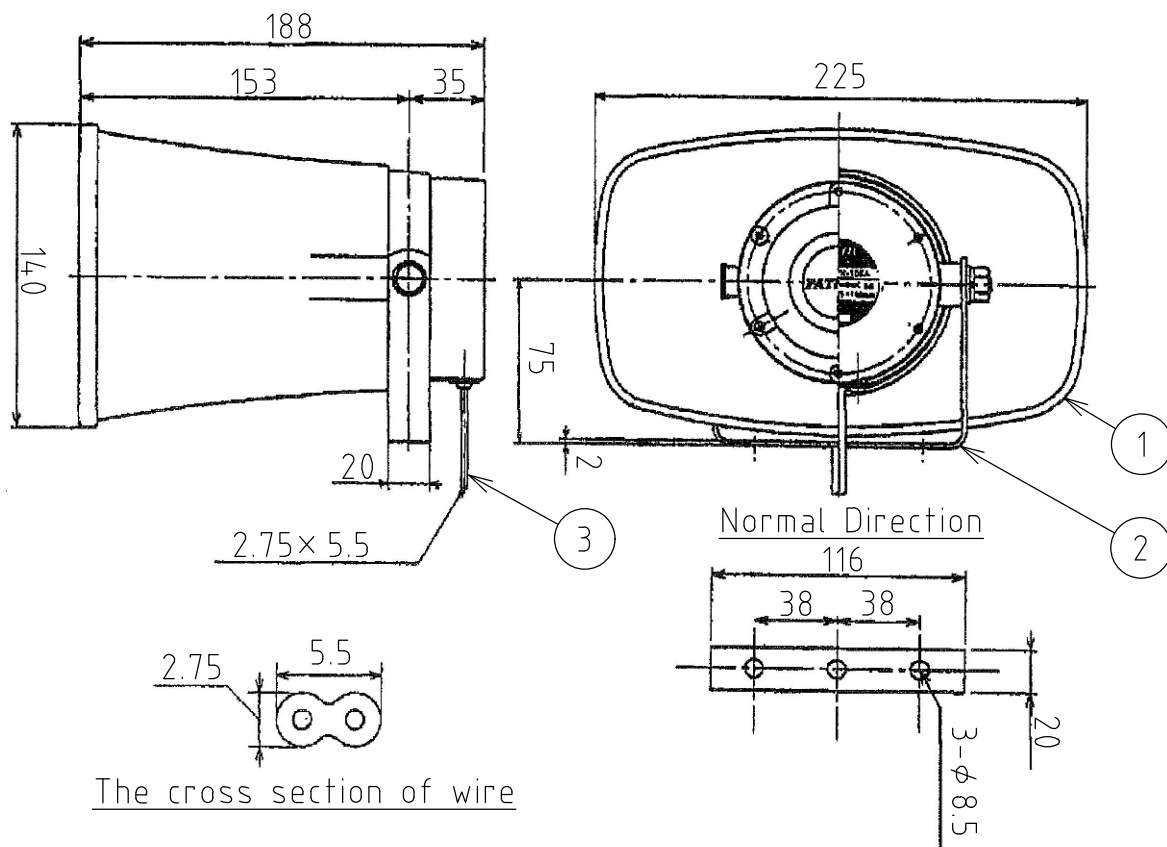

3	WIRE	2	600±50mm
2	MOUNTING ANGLE	1	
1	HORN	1	Light Gray
番号 No.	部品名 Part Name	数量 Qty.	記事 Remarks
機種 Model		特注No. S.P.No.	
SPH-10EA		-	
図名 Name			
Outer Dimensions Drawing			
品目コード Part No.		尺度 Scale	
-		三角法 3rd Angle P.	
		単位 Unit	
		mm	
		株式会社 パトライト PATLITE Corporation	